



浙江新和成特种材料有限公司

NHUI-PPA Resin

聚酰胺树脂

NHUI-PPA Resin是一种半结晶型热塑性聚酰胺，属于半芳香族聚酰胺，俗称高温尼龙，热变形温度高，韧性和耐摩擦性优异，熔融流动性良好，易于加工，耐酸碱和一般化学品腐蚀，机械性能优异。

牌号	PA11	PA12	PA12F	PA12G	PA12H	PA12I
ISO 11357-1	1000	1000	1000	1000	1000	1000
ISO 11357-2	1000	1000	1000	1000	1000	1000
ISO 11357-3	1000	1000	1000	1000	1000	1000
ISO 11357-4	1000	1000	1000	1000	1000	1000
ISO 11357-5	1000	1000	1000	1000	1000	1000
ISO 11357-6	1000	1000	1000	1000	1000	1000
ISO 11357-7	1000	1000	1000	1000	1000	1000
ISO 11357-8	1000	1000	1000	1000	1000	1000
ISO 11357-9	1000	1000	1000	1000	1000	1000
ISO 11357-10	1000	1000	1000	1000	1000	1000
ISO 11357-11	1000	1000	1000	1000	1000	1000
ISO 11357-12	1000	1000	1000	1000	1000	1000
ISO 11357-13	1000	1000	1000	1000	1000	1000
ISO 11357-14	1000	1000	1000	1000	1000	1000
ISO 11357-15	1000	1000	1000	1000	1000	1000
ISO 11357-16	1000	1000	1000	1000	1000	1000
ISO 11357-17	1000	1000	1000	1000	1000	1000
ISO 11357-18	1000	1000	1000	1000	1000	1000
ISO 11357-19	1000	1000	1000	1000	1000	1000
ISO 11357-20	1000	1000	1000	1000	1000	1000
ISO 11357-21	1000	1000	1000	1000	1000	1000
ISO 11357-22	1000	1000	1000	1000	1000	1000
ISO 11357-23	1000	1000	1000	1000	1000	1000
ISO 11357-24	1000	1000	1000	1000	1000	1000
ISO 11357-25	1000	1000	1000	1000	1000	1000
ISO 11357-26	1000	1000	1000	1000	1000	1000
ISO 11357-27	1000	1000	1000	1000	1000	1000
ISO 11357-28	1000	1000	1000	1000	1000	1000
ISO 11357-29	1000	1000	1000	1000	1000	1000
ISO 11357-30	1000	1000	1000	1000	1000	1000
ISO 11357-31	1000	1000	1000	1000	1000	1000
ISO 11357-32	1000	1000	1000	1000	1000	1000
ISO 11357-33	1000	1000	1000	1000	1000	1000
ISO 11357-34	1000	1000	1000	1000	1000	1000
ISO 11357-35	1000	1000	1000	1000	1000	1000
ISO 11357-36	1000	1000	1000	1000	1000	1000
ISO 11357-37	1000	1000	1000	1000	1000	1000
ISO 11357-38	1000	1000	1000	1000	1000	1000
ISO 11357-39	1000	1000	1000	1000	1000	1000
ISO 11357-40	1000	1000	1000	1000	1000	1000
ISO 11357-41	1000	1000	1000	1000	1000	1000
ISO 11357-42	1000	1000	1000	1000	1000	1000
ISO 11357-43	1000	1000	1000	1000	1000	1000
ISO 11357-44	1000	1000	1000	1000	1000	1000
ISO 11357-45	1000	1000	1000	1000	1000	1000
ISO 11357-46	1000	1000	1000	1000	1000	1000
ISO 11357-47	1000	1000	1000	1000	1000	1000
ISO 11357-48	1000	1000	1000	1000	1000	1000
ISO 11357-49	1000	1000	1000	1000	1000	1000
ISO 11357-50	1000	1000	1000	1000	1000	1000
ISO 11357-51	1000	1000	1000	1000	1000	1000
ISO 11357-52	1000	1000	1000	1000	1000	1000
ISO 11357-53	1000	1000	1000	1000	1000	1000
ISO 11357-54	1000	1000	1000	1000	1000	1000
ISO 11357-55	1000	1000	1000	1000	1000	1000
ISO 11357-56	1000	1000	1000	1000	1000	1000
ISO 11357-57	1000	1000	1000	1000	1000	1000
ISO 11357-58	1000	1000	1000	1000	1000	1000
ISO 11357-59	1000	1000	1000	1000	1000	1000
ISO 11357-60	1000	1000	1000	1000	1000	1000
ISO 11357-61	1000	1000	1000	1000	1000	1000
ISO 11357-62	1000	1000	1000	1000	1000	1000
ISO 11357-63	1000	1000	1000	1000	1000	1000
ISO 11357-64	1000	1000	1000	1000	1000	1000
ISO 11357-65	1000	1000	1000	1000	1000	1000
ISO 11357-66	1000	1000	1000	1000	1000	1000
ISO 11357-67	1000	1000	1000	1000	1000	1000
ISO 11357-68	1000	1000	1000	1000	1000	1000
ISO 11357-69	1000	1000	1000	1000	1000	1000
ISO 11357-70	1000	1000	1000	1000	1000	1000
ISO 11357-71	1000	1000	1000	1000	1000	1000
ISO 11357-72	1000	1000	1000	1000	1000	1000
ISO 11357-73	1000	1000	1000	1000	1000	1000
ISO 11357-74	1000	1000	1000	1000	1000	1000
ISO 11357-75	1000	1000	1000	1000	1000	1000
ISO 11357-76	1000	1000	1000	1000	1000	1000
ISO 11357-77	1000	1000	1000	1000	1000	1000
ISO 11357-78	1000	1000	1000	1000	1000	1000
ISO 11357-79	1000	1000	1000	1000	1000	1000
ISO 11357-80	1000	1000	1000	1000	1000	1000
ISO 11357-81	1000	1000	1000	1000	1000	1000
ISO 11357-82	1000	1000	1000	1000	1000	1000
ISO 11357-83	1000	1000	1000	1000	1000	1000
ISO 11357-84	1000	1000	1000	1000	1000	1000
ISO 11357-85	1000	1000	1000	1000	1000	1000
ISO 11357-86	1000	1000	1000	1000	1000	1000
ISO 11357-87	1000	1000	1000	1000	1000	1000
ISO 11357-88	1000	1000	1000	1000	1000	1000
ISO 11357-89	1000	1000	1000	1000	1000	1000
ISO 11357-90	1000	1000	1000	1000	1000	1000
ISO 11357-91	1000	1000	1000	1000	1000	1000
ISO 11357-92	1000	1000	1000	1000	1000	1000
ISO 11357-93	1000	1000	1000	1000	1000	1000
ISO 11357-94	1000	1000	1000	1000	1000	1000
ISO 11357-95	1000	1000	1000	1000	1000	1000
ISO 11357-96	1000	1000	1000	1000	1000	1000
ISO 11357-97	1000	1000	1000	1000	1000	1000
ISO 11357-98	1000	1000	1000	1000	1000	1000
ISO 11357-99	1000	1000	1000	1000	1000	1000

以上规格位为部分典型规格牌号，NHUI有能力提供更多符合市场及客户需要的等级

(1) 100°C, 30分钟, 标准测试条件, 5%伸长

使用注意事项

- 以上数据为产品的典型数值，不能作为产品验收标准。
- 最终制品会受到各种广泛因素的影响，产品介绍所示的数值不能保证完全适用客户的实际使用条件，引用时请客户做最终判断。
- 在使用之前必须对产品进行干燥处理，详情请参考相关MSDS。



浙江新和成特种材料有限公司

NHU-PPA Resin

高温尼龙树脂

建议改性工艺参数

螺杆转速: 300-400rpm


除湿干燥120℃
6-8小时
50-100mm
2mm



燃料温度
时间设定

50-100mm
2mm
50-100mm
2mm

建议改性工艺参数

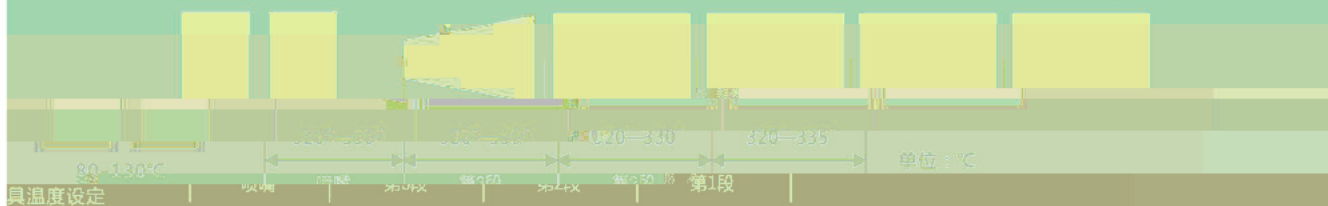

筒的温度设定

